

RAD[®] HIGH SPEED SERIES

Introduced to compliment the RAD[®] classic series torque wrenches, **RAD[®] HIGH SPEED SERIES** torque wrenches offer the same reliable and dependable solution for the installation and removal of heavy-duty fasteners where accuracy, power, and safety are required. **RAD[®] HIGH SPEED SERIES** torque wrenches incorporate a precision engineered high speed gear box designed for faster run down on time sensitive bolting applications reaching speeds as high as 300 rpm.



Extreme torque with high RPM productivity



RAD[®] 350SL-2




RAD[®] 800NG-2



RAD[®] 1400NG-2

HIGH SPEED SERIES DIMENSIONS

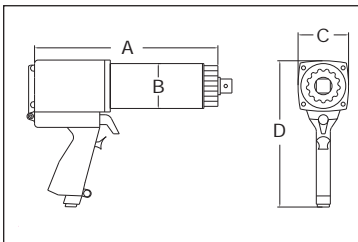

Torque (Ft. Lb.)	Pressure (PSI)
200	30
250	37
300	45
350	52
400	60
450	68
500	76
550	85

All RAD[®] Pneumatic Series tools include a laminated torque/PSI chart, assuring maximum accuracy and performance

PART NUMBER	TOOL MODEL	DRIVE SIZE	TORQUE (ft. lbs.) LOW	TORQUE (ft. lbs.) HIGH	RPM	WEIGHT (lbs.)	NOISE LEVEL	DIMENSION A	DIMENSION B	DIMENSION C	DIMENSION D
12317	350SL-2	0.75"	100	350	300	8.3	80 db	9.0"	2.4"	2.75"	8.75"
12322	550SL-2	0.75"	200	550	170	9.0	80 db	9.5"	2.4"	2.75"	8.75"
12330	800NG-2	0.75"	300	800	170	11.5	85 db	9.75"	2.84"	3.3"	9.5"
12339	1400NG-2	1.0"	500	1400	69	16.0	85 db	11.5"	3.0"	3.3"	9.5"
12343	1800NG-2	1.0"	700	1800	53	16.0	85 db	11.5"	3.0"	3.3"	9.5"
12349	30-2	1.0"	1400	3000	55	25.0	85 db	15.7"	3.1"	3.4"	10.4"

Visit our website for a complete up-to-date list of products.

Accuracy of +/-5%, Repeatability of +/-2%